

# CS20 • CS24 CS26 RIBBED



# CHOOSE YOUR OPTIONS

INSULATION	CS20	CS24	CS26
Foam/Insulate	Plain Steel/ T-Bond	Plain Steel/ T-Bond	Plain Steel/ T-Bond
R-Value	T-Bond: 7.0	T-Bond: 7.0	T-Bond: 7.0
U-Factor (Btu/hr/ft2/F)	0.38	0.38	0.38
Thickness	2 inches	2 inches	2 inches
Maximum Width	40 ft 2 in	24 ft 2 in	16 ft 2 in
Exterior Steel	20 gauge	24 gauge	26 gauge
Warranty* Excludes Springs	10 years	10 years	25 years

## COLORS




\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.

\*For full warranty details contact your Midland dealer



## WINDOWS

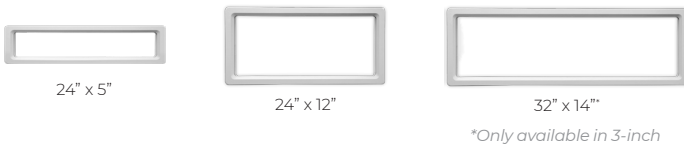


## GLASS



\*Tempered only. All other glass is available in both tempered and untempered.


## TRACK MOUNTING



**Reverse Angle Mounted Track**  
Continuous leg-in angle to attach to steel jambs




**Angle Mounted Track**  
Continuous leg-out angle used on larger doors to attach to wood jambs




**Bracket Mounted Track**  
To attach to wood jambs


## TRACK CONFIGURATIONS



**Standard Lift**  
For normal installations




**Inclined Track**  
To follow pitch of roof



**Hi-Lift**  
To put horizontal track as close to ceiling as possible



**Vertical Lift**  
Full vertical rise where headroom is available



**Low Headroom**  
For low-clearance installations

**MIDLAND™**  
GARAGE DOOR MFG CO

midlandgaragedoor.com • 800.437.4056

YOUR LOCAL GARAGE DOOR PROFESSIONAL