


# COUNTER SWING DOOR

SMOOTH OPERATION • MAXIMUM CLEAR OPENING VIEW • ONE-PIECE INSTALLATION




## FRAME COLORS

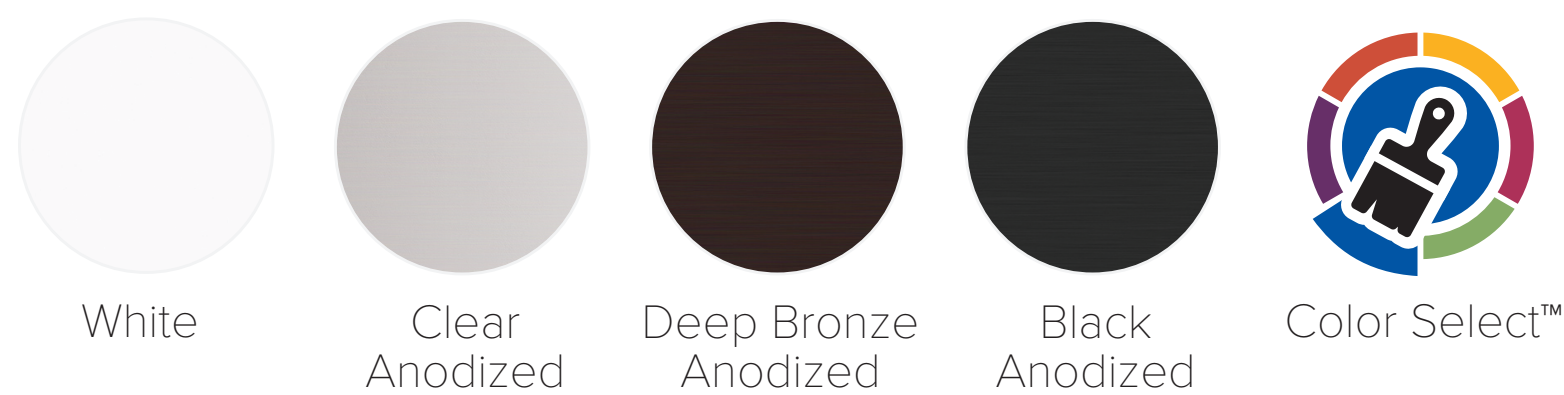

*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.*

## LAMINATED OR TEMPERED GLASS

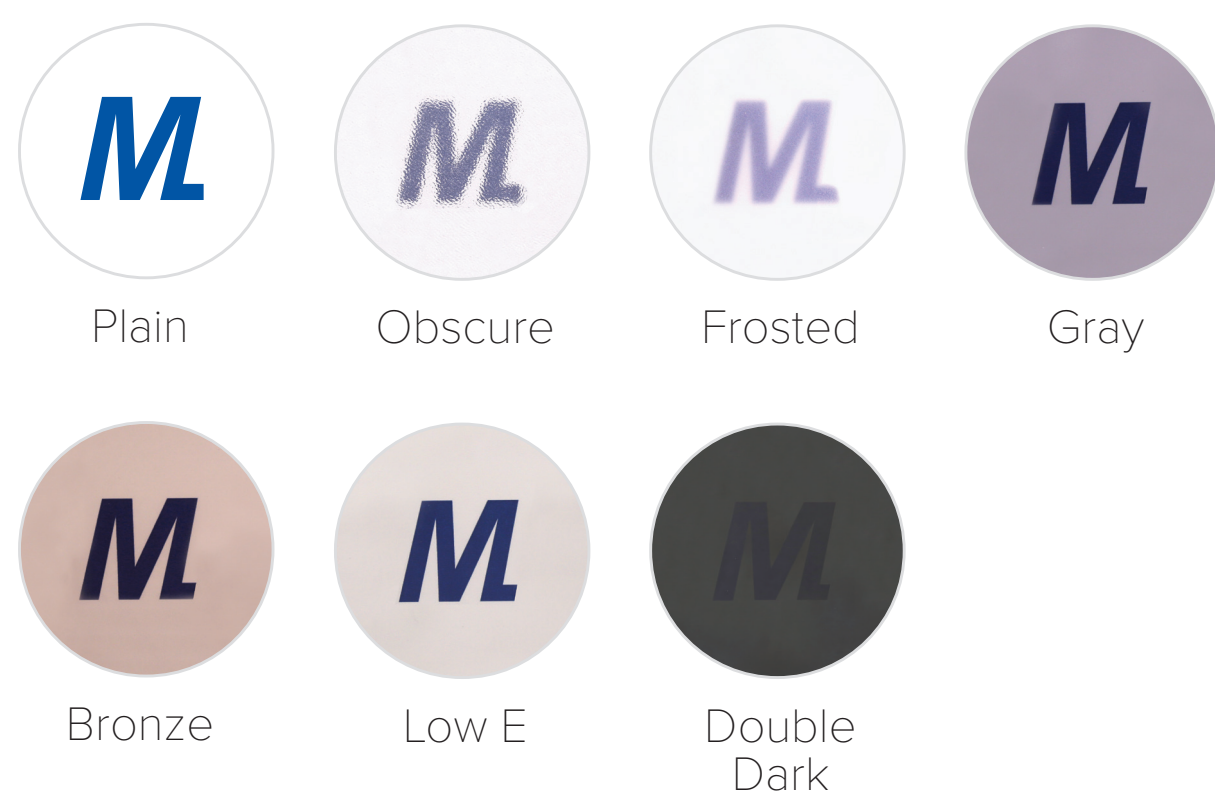

## SPECIFICATIONS

Frame	6063-T Aluminum
Thickness	2 inches
Warranty	2 years



## OPERATION

- 24 Volt electric actuator provides optimum lift
- Constant pressure switch to control the open and close of the door
- Soft start and soft stop to control speed and reduce strain on the motor
- Compact plug and play controller

## INSTALLATION

- Factory assembled for easy installation
- Door includes mounting frame to attach door to framed structural opening
- Requires minimal headroom
- Continuous mounting hinge

## SAFETY

- Over current protection system, protects the circuit from overload conditions or dangerous temperatures
- Safety reverse
- Requires minimal headroom
- Touch-activated safety edge and photo eyes are available

