


COMMERCIAL ENERGYSAVER™



CHOOSE YOUR OPTIONS

INSULATION	3-Inch EnergySaver™	2-Inch EnergySaver™
Foam/Insulate	Extruded closed-cell polystyrene	Polystyrene
R-Value	17.05	9.25
U-Factor (Btu/hr/ft ² /F)	0.145	0.220
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 in.	24 ft. 2 in.
Exterior Steel	25 gauge <i>20 gauge upgrade, white only</i>	25 gauge <i>20 gauge upgrade, white only</i>
Interior Steel	25 gauge	25 gauge
Warranty* Excludes Springs <i>*For full warranty details contact your Midland dealer</i>	10 years	10 years

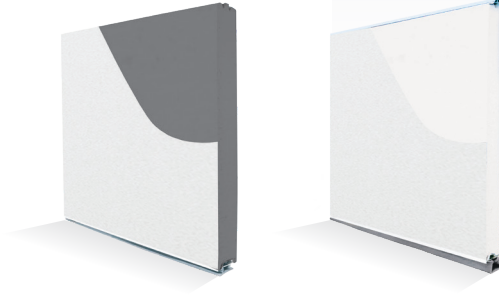


COLORS



**ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.*

WINDOWS

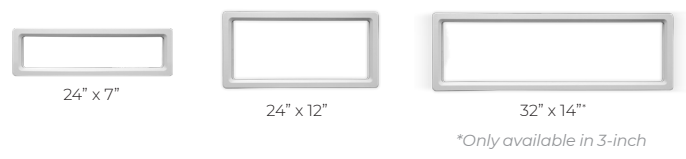

**Only available in 3-inch*

GLASS



**Tempered only. All other glass is available in both tempered and untempered.*

TRACK MOUNTING



TRACK CONFIGURATIONS

